

ISOProx® II

Features

Proven, Reliable Technology

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

Thin

Can be carried with credit cards in a wallet or purse. Use with a strap and clip as a photo ID badge.

Photo ID Compatible

Print directly to the card with a direct image or thermal transfer printer. Slot punch vertically or horizontally for easy use.

Cross-reference

A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.

Security

Offers over 137 billion unique codes.

Long Life

Passive, no-battery design allows for an infinite number of reads.

Durability

Strong, flexible and resistant to cracking and breaking.


Custom Artwork

Custom multicolor graphics and text are available.

Note: custom graphics may increase overall card thickness.

Warranty

Warranted against defects in materials and workmanship for 2 years from date of shipment. See complete warranty policy for details.

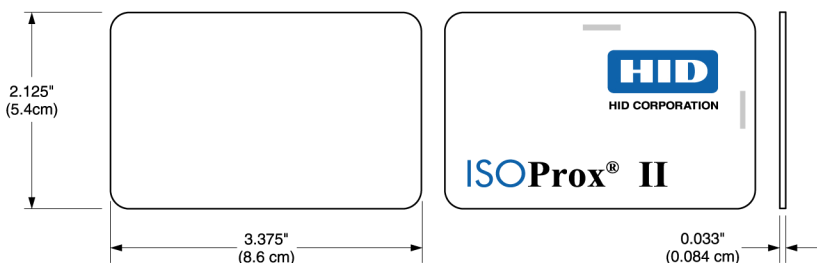

Specifications

Typical Maximum* Read Range

MiniProx® reader-up to 5" (12.5 cm)

ThinLine II® reader-up to 5" (12.5 cm)

ProxPoint® Plus reader-up to 2.5" (6.25 cm)

ProxPro® reader-up to 7" (17.5 cm)

MaxiProx® reader-up to 20" (50 cm)

*Dependent on local installation conditions.

Dimensions

2.125" x 3.375" x 0.033" max.

(5.40 x 8.57 x 0.084 cm)

Card Construction

Thin, flexible polyvinyl chloride (PVC) laminate.

Operating Temperature

-50° to 160° F (-45° to 70° C)

Weight

0.24 oz. (6.8 gm)

Part Number

Base Part No.: 1386

Description

RF-programmable, 125 kHz, customer-specified ID numbers, locations marked for horizontal and vertical slot punch

Options

- External card numbering (inkjet or laser engraving)
- Slot punch (horizontal or vertical)
- Custom artwork (text or graphics)